

## The use of COMSOL to solve hygro thermal building physical problems related to insulating high rise building facades.

H.L. (Henk) Schellen (PhD), A.W.M. (Jos) van Schijndel (PhD), E. (Edgar) Neuhaus (MSc)  
Eindhoven University of Technology, Department of Building and Architecture, VRT 6.29; P.O.  
Box 513; 5600 MB Eindhoven; The Netherlands; H.L.Schellen@bwk.tue.nl

**Abstract:** In The Netherlands high rise buildings from 1960 and before hardly were insulated. To improve the thermal performance of the buildings the facades may be retrofitted by insulating them afterwards. The energy loss will be reduced and thermal comfort will be improved by higher indoor surface temperatures. Problems, however, may be introduced by thermal bridge effects of anchors, floors and indoor walls. Furthermore the outer facade surface will be colder during winter time. Frost damage and internal condensation may be deleterious building physical effects here. The purpose of the work is to prevent damages which may result from insulation retrofitting of building facades.

For this type of building physical problems specific software has been developed since the 1980's and is in use all over the world. The coupling of thermal, hygric and air flow effects, however, has not been solved most of the times. An attempt has been made to solve this type of coupled problems by the use of COMSOL.

As an example of this kind of coupled problems the thermal bridge effect of the connection of a floor and facade in a non insulated and afterwards insulated facade of a high rise building has been examined. The air flow calculation in the cavity was coupled to the thermal and hygric diffusion process. The results of the separately uncoupled COMSOL simulations (like thermal bridge calculations) were compared with results from third party software and the coupled simulation results were compared with infrared thermographs.

The conclusion of the paper is that the use of COMSOL in this type of problems may solve the problem of coupled building physical effects in building constructions.

**Keywords:** Building, construction, thermal bridges, insulation, air flow, modeling.

### 1. Introduction

The building case introduced here is an office building in Eindhoven, The Netherlands [4]. The building is a high rise building, counting 10 floors and dating from the 1960's (figure 1).



Figure 1 Building facade

The construction of the building consists of concrete floors and breastwork of concrete and masonry (figure 2).

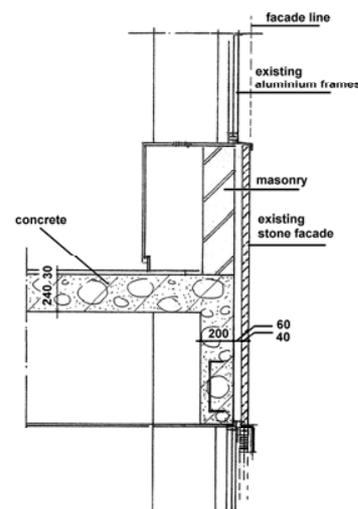


Figure 2 Vertical section of the facade

The outer facade is finished with natural stone slabs with a thickness of 40 mm. An air gap of about 60 mm is in between. The reduction of energy consumption related to this building is of great importance. Therefore the thermal resistance of the facade should be improved. The higher indoor surface temperatures will also improve thermal comfort and decrease the mould and condensation risk. To retrofit the construction by insulation, a choice has to be made for the type of insulating material and the position in relation to the facade materials. For the type of insulation material a choice can be made out of a number of materials: mineral wool, expanded or extruded polystyrene, polyurethane. For a decision on the location of the insulation material it can be situated at the inside or in the gap in between the facade slab and the concrete or masonry breastwork.

A building physical analysis should be made of the thermal and hygric effects of these choices. Until now third party software has been developed to calculate energy losses, thermal bridge effects and moisture effects of this kind of constructions. The coupling however of the thermal, hygric and air flow effects in this type of constructions has not been solved in this software. In this article an attempt has been made to solve this type of coupled problems by the use of COMSOL.

## 2. Method

The method of research was the following: First, an impression of the thermal performance of the facade construction was made by infrared thermal imaging. Second, modeling of the 2D thermal bridge effect of the original and afterwards insulated facade construction was compared, using third party software and COMSOL. Third, moisture effects were introduced using a coupled 2D heat and moisture transport model in COMSOL. Finally the effect of air flow in the construction was modeled with COMSOL.

## 3. Measurements

To get an impression of the thermal quality and thermal performance of the building infrared thermal images of the exterior and interior of the facade have been made during a relatively cold winter period. In these thermal images a relatively large heat loss at the outside surface is

visible as an increase in surface temperature. From the inside the larger heat loss is seen in a reduction of the surface temperature, leading to a reduced thermal comfort experience, an increased risk of mould growth and sometimes even condensation.

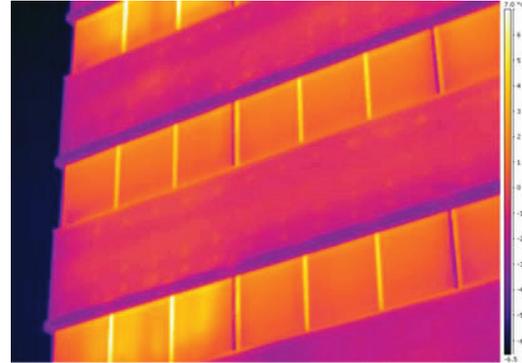


Figure 3 Infrared thermal image of the facade

The infrared thermo graphic measurements took place during a cold winter period on February 7<sup>th</sup> 2007 in the morning. The sky was clouded and the air temperature was about 1 °C.

Conclusions from the infrared images are the following:

The facade is hardly thermal insulated. A well insulated facade would appear with a temperature in the order of the outdoor temperature.

The thermal quality of the facade is in the order of its simple double glazing.

The U-value of the aluminum frame is larger (i.e. worse) than the U-value of the double glazing.

## 4. Calculations

### 4.1 Thermal bridge calculations

To evaluate the retrofitting effects of insulating a construction afterwards it is quite usual to use so called thermal bridge calculations. Since the 1980's specific software has been developed to calculate the 2- and 3D thermal bridge effects in building constructions. The computer program BISCO [1] e.g. is a well known computer code to calculate the 2D effects of a thermal bridge. It's calculations are based on 2D stationary heat conduction, mathematically described by the Laplace equation:

$$\nabla(-\lambda \nabla \theta) = 0 \quad (1)$$

$$\begin{aligned} \theta &= \text{Temperature} && [^{\circ}\text{C}] \\ \lambda &= \text{Thermal conductivity} && [\text{W/m.K}] \end{aligned}$$

The BISCO and COMSOL software have been used to calculate the thermal bridge effect when insulating the cavity between the facade slab and the construction behind, or insulating the construction from the inside. The material properties, as they were used in the calculations, are summarized in table 1.

Table 1 Thermal and hygric properties of building materials

Material	Thermal conductivity. $\lambda$ [W/(m·K)]	Density $\rho$ [kg/m <sup>3</sup> ]	Diffusion resistance $\mu$ [-]
Brick	0.6	1900	10
Natural stone	2.3	2440	140
PUR	0.035	33	50
Concrete	1.6	2300	180
Mineral wool	0.040	60	1.3
XPS	0.034	30	100

Figure 4 shows the effects from insulating the cavity.

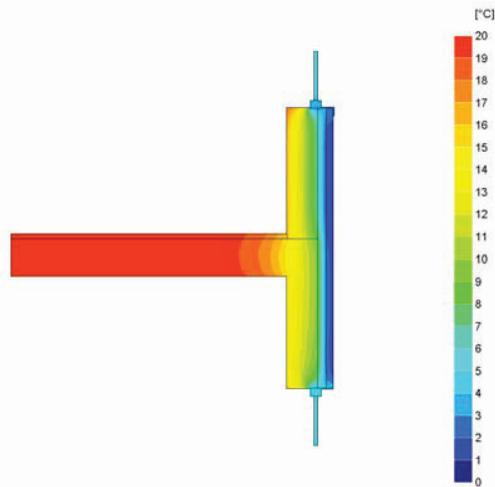


Figure 4 Thermal bridge calculations in BISCO of the insulated construction

From the results it is clear that the interior construction will become warmer after insulating the cavity. The outer natural stone slab, however, will decrease in temperature. The results from the BISCO and COMSOL calculations were identical.

#### 4.1.1 Temperature factor

To reduce the risk on surface condensation and mould growth Dutch standards demand a

calculation of the so called temperature factor. This factor is a dimensionless number, representing the lowest temperature of the thermal bridge. It is defined by

$$f = \frac{\theta_{si,min} - \theta_e}{\theta_i - \theta_e} \quad (2)$$

Indices:

- si,min : interior surface, minimum
- i : interior
- e : exterior

For office buildings in The Netherlands an f-factor is required of at least 0.50.

The table below gives the results of the calculated inside surface temperatures and the resulting temperature factor as they were calculated using BISCO (or COMSOL).

Table 2 Temperature factor at the connection upper surface floor-facade

Insulation variant	$\theta_{si,min}$	f	Ok?
1. Original non insulated facade	12	0,60	yes
2. PUR insulation in cavity	18	0,90	yes
3. XPS at the inside surface	13	0,65	yes
4. XPS as 3 with additional material	16	0,80	yes

#### 4.1.2 Linear U-value

Due to thermal bridge effects there is an increased heat loss through the building construction, compared with the 1-dimensional heat loss without thermal bridges. The extra heat loss can be defined by a linear U-value  $\Psi$ . The linear U-value is the extra heat loss for a 2D thermal bridge with a length of 1 meter exposed to a temperature difference across the construction of 1 K.

Making use of the heat loss as it was calculated by BISCO (or COMSOL) the linear U-value can be calculated from:

$$\psi = \frac{\phi}{\theta_i - \theta_e} - U_1 l_1 - U_2 l_2 \quad (3)$$

- $\phi$  = Total heat loss through construction [W]
- U = 1D overall heat transfer coefficient of construction [W/m<sup>2</sup>K]
- l = Length of constructions [m]

The table below summarizes the linear U-values as they were calculated using BISCO (or COMSOL).

Table 3 Linear U-values

Insulation variant	Linear U-value [W/m <sup>2</sup> .K]
1. Original non insulated facade	0,56
2. Insulation in gap	0,15
3. XPS with additional material	0,57

#### 4.1.3 Conclusions from thermal bridge calculations

Conclusion from the thermal bridge calculations is that the thermal bridge effect is minimal for variant 2 with gap insulation. The results from the thermal bridge calculations show that insulating the gap between external slab and interior building construction results in higher interior surface temperatures. Thermal comfort therefore will increase and the risks on mould growth will reduce. The slab temperatures however will be lower. Furthermore, due to the insulation material in the gap the ventilation will be reduced and the slab material will get wetter. Together with lower slab temperature effects the deterioration risk by freezing of the slab will increase. That is why a combination of thermal and hygric effects should be included in the calculations.

#### 4.2 Hygro thermal calculations

For the calculation of the coupled thermal and hygric transport throughout a facade section the Fraunhofer Institute in Germany e.g. developed a computer code WUFI [5]. The drying effects in the ventilated gap, however, are not included in this kind of model. That is why COMSOL was used to calculate the coupled thermal, hygric and air flow effects.

The COMSOL model is based on the following equations for steady state conditions:

Thermal transport by conduction and convection:

$$\nabla \cdot (-\lambda \nabla \theta) = -\rho c_p \vec{u} \nabla \theta \quad (4)$$

- $\rho$  = Density [kg/m<sup>3</sup>]
- $c_p$  = Constant pressure specific heat [J/kg.K]
- $\vec{u}$  = Air velocity [m/s]

Vapour transport by diffusion and convection:

$$\nabla \cdot \left( -\frac{\delta}{\mu} \nabla c \right) = -\frac{\vec{u}}{RT} \nabla c \quad (5)$$

- $c$  = Vapour concentration [kg/m<sup>3</sup>]
- $\delta$  = Water vapour permeability [s]
- $\mu$  = Vapour diffusion resistance number [-]
- $R$  = Specific gas constant for water vapor [J/kg.K]
- = 462 J/kgK

Incompressible air flow:

$$\rho \vec{u} \nabla \vec{u} = \nabla \cdot [-pI + \eta(\nabla \vec{u} + (\nabla \vec{u})^T)] \quad (6)$$

$$\nabla \cdot \vec{u} = 0 \quad (7)$$

- $I$  = Identity matrix [-]
- $p$  = Pressure [Pa]
- $\eta$  = Dynamic viscosity air [Pa.s]
- = 1,7E-5 Pa.s

The stationary boundary conditions were:

Thermal:

$$q = h_o \cdot (\theta_o - \theta_s) \quad (8)$$

- $q$  = Heat flux at surface [W/m<sup>2</sup>]
- $h$  = Heat transfer coefficient [W/m<sup>2</sup>.K]
- $h_i = 7.7$  W/m<sup>2</sup>.K
- $\theta_i = 20$  °C
- $h_e = 25$  W/m<sup>2</sup>.K
- $T_e = 0$  °C

Hygric:

$$g = \frac{\beta_o}{\rho} \cdot (c_o - c_s) \quad (9)$$

- $g$  = Vapor flux at surface [kg/m<sup>2</sup>.s]
- $\beta$  = Vapor transfer coefficient [kg/m<sup>2</sup>.s]
- $\beta_i = 7.1E-3$  kg/m<sup>2</sup>.s
- $c_i = 0.5 \cdot c_{sat}(\theta_i) = 0.0088$  kg/m<sup>3</sup>
- $\beta_e = 22.9E-3$  kg/m<sup>2</sup>.s
- $c_e = c_{sat}(\theta_e) = 0.0035$  kg/m<sup>3</sup>
- $c_{sat}$  = Saturation concentration [kg/m<sup>3</sup>]

Air flow:

- $u_o$  = inlet velocity [m/s]
- $u_o = 0$  (no ventilation)
- $u_o = 0.1$  (no insulation in gap)
- $u_o = 0.01$  (mineral wool in gap)

Indices:

- $o$  : environmental
- $s$  : surface

#### 4.2.1 Variant study

The coupled thermal and hygric calculations were evaluated for a number of 4 variants:

Variant

- 1: the original non insulated facade
- 2: mineral wool in gap
- 3: Polyurethane (PUR) in gap
- 4: inside surface insulation with extruded polystyrene (XPS)

We refer to the \*.mph file for further details on geometry and related materials.

#### 4.2.2 Results

*Variant 1: the original non insulated facade*

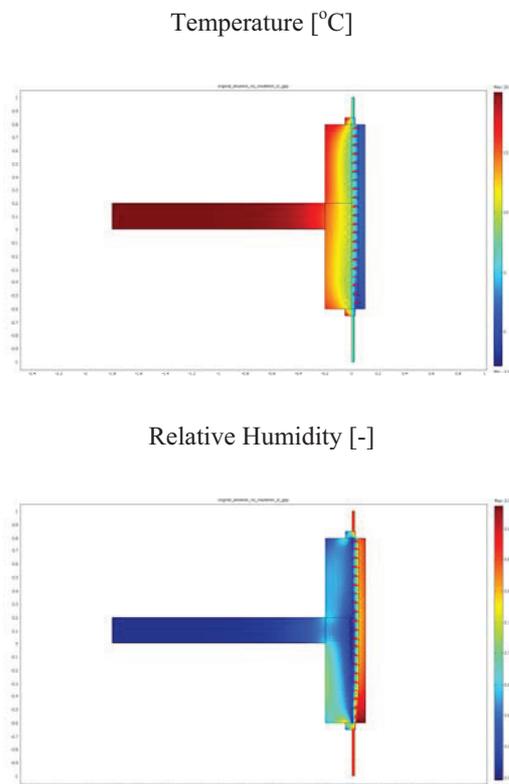


Figure 5 the original non insulated facade

The non insulated construction shows construction temperatures which are rather low. Due to the vapor flux from indoor to outdoor condensation will occur in the gap at the cold outdoor slab. Drying of this slab will take place by ventilation of the cavity.

*Variant 2: mineral wool in cavity*

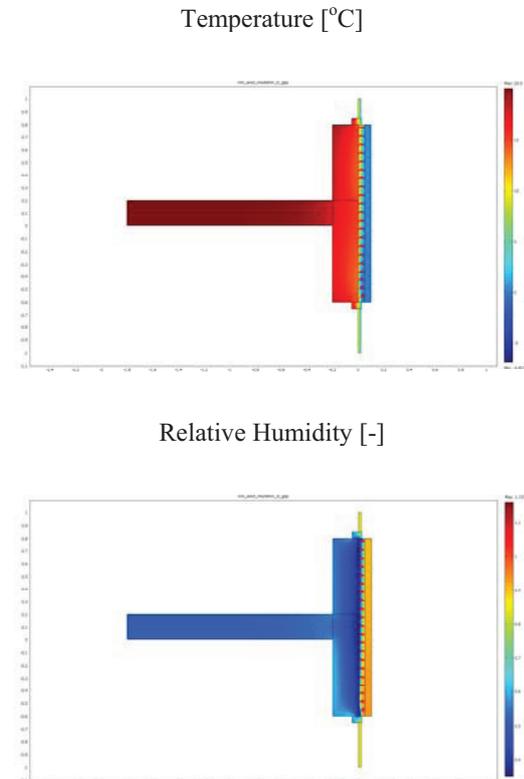


Figure 6 mineral wool in gap

Due to the insulation material in the gap the construction temperatures at the inside will remain rather high. The outside slab however will get colder and higher relative humidities will occur at the slab surface in the gap. The density of the mineral wool is low and some air flow by ventilation will still remain.

*Variant 3: polyurethane in the cavity*

Polyurethane in the cavity will give construction temperatures which are likewise as variant 2. The ventilation of the gap, however, is not possible anymore. The intrinsic vapor resistance is much larger than in the mineral wool case. The result will be a rather high vapor resistance and low relative humidity at the cross section of the concrete breastwork.

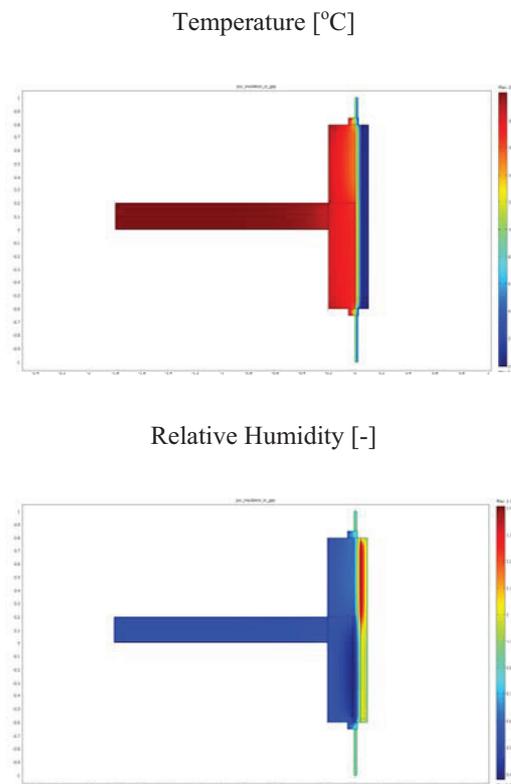


Figure 7 polyurethane in the cavity

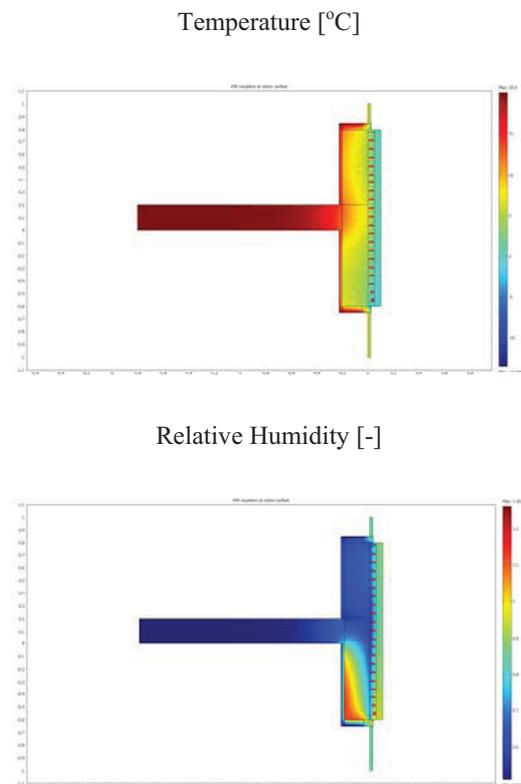


Figure 8 inside surface insulation with XPS

*Variant 4: inside surface insulation with XPS*

Insulation at the inside surface with a rather vapor resistant material like extruded polystyrene will lead to rather low construction temperatures behind the insulation material. The vapor flow into the material, however, will be low. The natural ventilation of the cavity will remain intact and the relative humidity in the gap will remain low. The ventilation with cold air will cool down the construction at the inlet. This is the reason for an increasing relative humidity at the inner construction part.

**4. Conclusion**

The insulation retrofitting of a facade with a natural stone slab has important building physical effects. Thermal and hygric simulations show that the occurrence of condensing moisture at the slab surface in the gap depends on the choice of insulation material and the place it is installed. The drying of the natural stone slab construction depends on the ventilation of the gap. Therefore it is important to make use of coupled thermal, hygric and air flow calculations in the simulation study. Most of the known building physical simulation tools do not include this coupling. Therefore the use of COMSOL for these situations may be important in future.

## 6. References

1. Physibel (2002), BISCO, computer program to calculate two-dimensional steady state heat transfer in free-form shaped objects using the energy balance technique, BISCO 6.0W manual
2. Künzel H.M., Schmidt T. & Holm A. (2006), WUFI Pro 4.1: Programm zur instationären berechnung des ein-dimensionalen Wärme und Feuchtetransports in Bauteilen, Fraunhofer Institut für Bauphysik, Holzkirchen
3. Künzel H.M. (1995), Simultaneous Heat and Moisture Transport in Building Components. - One- and two-dimensional calculation using simple parameters. Fraunhofer IRB Verlag
4. Pernot C., Neuhaus E. & Schellen H.L. (2007), GGD-toren Stadhuisplein 2 te Eindhoven: adviesrapport inzake de gevelrenovatie, Technische Universiteit Eindhoven, BPS-rapport 07.04

## 7. Acknowledgements

The authors like to thank the municipality of Eindhoven, The Netherlands, for their involvement and support.